

Flame sensor

Flame sensor for monitoring gas, oil and coal flames, primarily in multi-burner view applications

Features


- Self-monitoring and fail-safe in conjunction with a control unit/ burner control
- Flame sensors for every spectral range from UV to IR
- Connection to the D-UG 120 control unit, D-UG 660 control unit as well as to the D-GF 150 (-MB) burner control
- Uniform output signal thus mutually interchangeable
- Adjustable to different combustion technologies such as exhaust gas recirculation
- Compliance to general safety regulations
- ATEX approved (D-LE 603 .../94 Ex for zone 1 and D-LE 603 .../97Ex for zone 2)

Applications

- Power stations
- Chemical industry
- Refineries
- Cement plants
- Waste incinerators
- Steam generators
- Heating plants

Certifications

- DVGW
- UL 372
- FM Class 7610
- AGA: AS 4625
- EAC
- ATEX
- SIL3

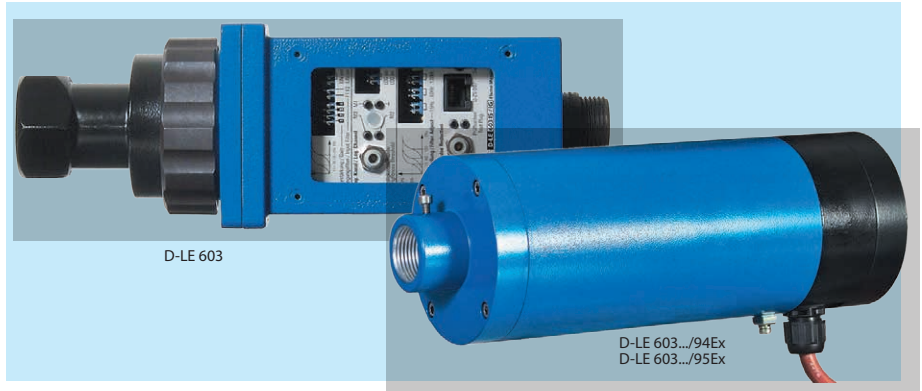

Functional description

The photo element in the flame sensor generates a signal which is proportional to the flame radiation intensity. The output signal of the flame sensor is used as an input signal to a control unit or a burner control. The D-LE 603 flame sensor is available with different photo elements for maximum selectivity when using various fuels.


Accessories

- **Digital display** for optimal alignment of flame sensors (D-ZS 087 - 20)
- **Optical adjustment aid** for alignment of the swivel mount on the sighting tube (D-ZS 118)
- **UV-C test light source** 230 V/ 50 Hz (D-ZS 077-10)
- **UV-A, UV-B and IR test light source** 230 V/ 50 Hz
- **Swivel mount** for the alignment of the flame sensor
- **Thermal isolator** with electrical insulation
- **Ball valve** for closing the sighting tube
- **Terminal box** for connecting flame sensor (D-ZS 140/ 141).

Flame sensor selection

Flame sensor	Suitability for fuels				Features
	Gas	Oil	Coal	Wood	
D-LE 603 UH	++	o			selective single burner monitoring in multiple-burner plants
D-LE 603 US	++	+			at low UV radiation
D-LE 603 UAF	o	++			with intensive ambient light (neighbouring burners), gain switchover
D-LE 603 UA	+	++	+	o	at low NO _x component, gain switch-over
D-LE 603 UI	++	++	+	+	remote changeover of spectral sensitivity
D-LE 603 IS	!	+	++	+	selective single burner monitoring (coal, oil)
D-LE 603 IG	o	+	++	++	selective single burner monitoring (coal, oil, wood)
D-LE 603 ISE	!		++		dual-channel flame sensor (LOG/LOG)
D-LE 603 ISO	!		++		dual-channel flame sensor (LIN/LOG)

++ ideally suited + well suited o conditionally suited ! not permitted (from experience)

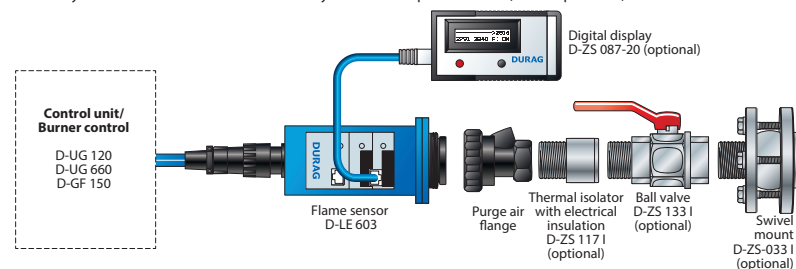

Operational mode	Intermittent operation, continuous operation and 72-hour operation without permanent supervision	Dimensions	90x92 mm, length approx. 350 mm
		Weight	approx 1.8 kg
Safety	Self-monitoring and fail-safe in conjunction with a control unit/ burner control	Sighting tube connection	G 1¼"
		Purge air connection	G ½"
Protection class	with cable gland (D-LE 603 ... -CG) IP65 with axial plug (D-LE 603 ... -P) IP67	D-LE 603 .../9xEx	
		Protection class	IP65
Gain	four settings	/94Ex /95Ex /96Ex /97Ex	II 2G Ex de IIC T5/T6 Class I, Div. 1, Group B, C & D Class I, Div. 2, Group A, B, C & D II 3G Ex nAnC IIC T6
High-pass filter	three settings		
Spectral ranges	UV, VIS, IR	/94Ex, /95Ex	
Viewing angle	6°	Dimensions Weight	Ø 130 mm, length 313 mm approx. 4.3 kg
Perm. ambient temperature	-20 °C to +60 °C	Sighting tube connection	G1 " (/94Ex, /95Ex) G 1¼" (/96Ex, /97Ex)

